




41IOM000

ADDRESSABLE MODULE WITH 1 MONITORED OUTPUT

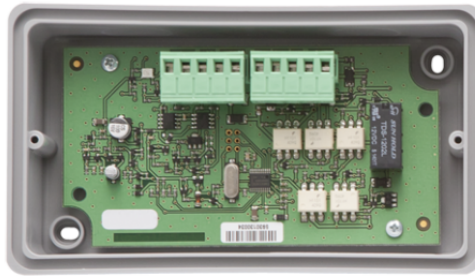

The 41IOM000 addressed module with built-in isolator controls a voltage output for controlling audible and visual devices, electromagnetic door stops, etc. with a separate power supply. Terminals for 24 V users and separate 24 V max. 750 mA outputs. It is powered from the loop and is controlled by the control panel by means of the communication protocol. The module comes in a plastic container which is suited to wall mounting; it has a transparent plastic cover for easy visual inspection. Approved to EN 54-17 and EN 54-18.



41IOM000

ADDRESSABLE MODULE WITH 1 MONITORED OUTPUT

MAIN FEATURES

Isolator	Yes
EN regulations	EN54-17, EN54-18

HARDWARE SPECIFICATIONS

Height (mm)	80
Width (mm)	142
Depth (mm)	45
Type of finishing materials	ABS
Product color	Branco, cobertura transparente
Product weight (g)	230
Operating temperature (°C)	-10 ÷ 60
Operating humidity (RH max @40°C) (%)	0 ÷ 96
Cross-section for terminals (mm)	0.4 ÷ 2.5

ELECTRICAL SPECIFICATIONS

Supply voltage	15÷32VDC
Absorption in stand-by (mA)	0.27
Rated absorption	270uA@27VDC
Absorption with 1 LED ON (mA)	3.6
Output(s) maximum current	0.75A@28VDC/0.5A@120VAC
No. of relay outputs or No. of monitored outputs (n°)	1

GENERAL DATA

IP protection rating	IP21
----------------------	------